


Heavy Duty Hygro-Thermometer

Dual display of Relative Humidity and Temperature with PC interface

Features:

- Fast response from 10 to 95% RH
- C/F switchable 32 to 122°F (0 to 50°C) to 0.1°
- Utilizes high precision thin film capacitance sensor for RH and thermistor for temperature
- Accurate to 3% RH; 1.5°F; 0.8°C
- Data Hold and Auto Shut off
- Super large 1.4" (36mm) LCD display
- Records Max/Min and AVG readings
- Built-in RS-232 PC serial interface with optional Data Acquisition software and Datalogger
- Complete with remote 6.25" (159mm) probe with 36" (.9m) cable, heavy duty rubber holster, 9V battery. Dimensions: 7x2.9x1.3" (178x74x33mm); Weight: 18oz. (510g).

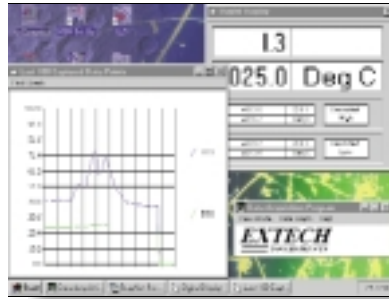

3 Year Warranty



Interface Options:

- Optional Windows® Data Acquisition Software and serial cable enable user to display and capture readings on a PC, and set time intervals and alarms
- Optional battery operated Datalogger module stores over 8000 readings for later transfer to a PC

Ordering Information

407445.....Heavy Duty Hygro-Thermometer
407445-NIST..Heavy Duty Hygro-Thermometer with NIST Certificate

Accessories

407453.....33% RH Calibration Reference
407465.....75% RH Calibration Reference
156119117 VAC Adaptor
156221220 VAC Adaptor
409997Soft Vinyl Pouch Carrying Case
140001.....Hard Vinyl Carrying Case

Options:

407000Data Acquisition program and cable
380340Battery Operated Datalogger Module